







Measure more with less.

5-IN-1 Measurement - Measure four process variables along with a HI level switch from a single tank opening. Level Plus® liquid level transmitters provide the ability to measure product level, interface level, multi-point temperature and volume in a process from a single level transmitter. The new LevelLimit transmitter goes a step further and adds an electrically isolated HI level switch for overflow protection. No other level transmitter can do so much so accurately. Save Time and Money and Headaches, choose Temposonics.

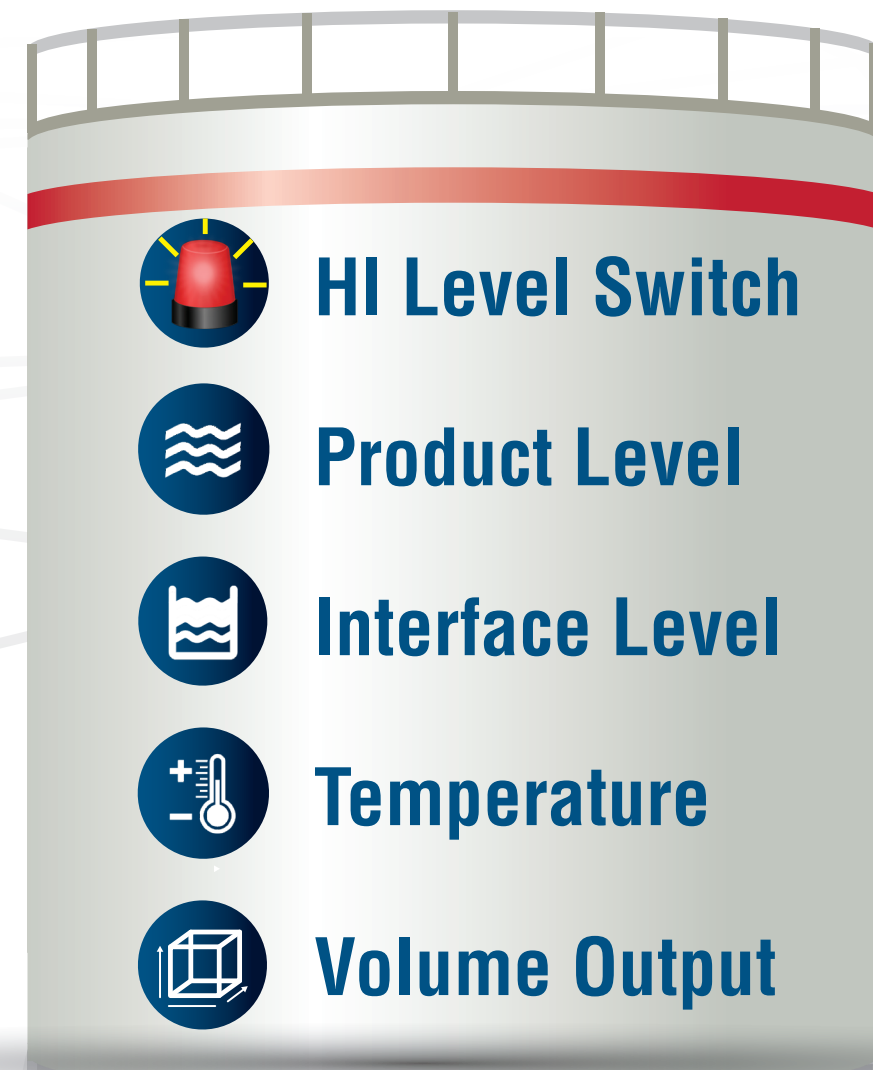

-  **HI Level Switch**
-  **Product Level**
-  **Interface Level**
-  **Temperature**
-  **Volume Output**

UNITED STATES 3001 Sheldon Drive
Temposonics, LLC Cary, N.C. 27513
 Americas & APAC Region Phone: +1 919 677-0100
 E-mail: info.us@temposonics.com

GERMANY Auf dem Schüffel 9
Temposonics 58513 Lüdenscheid
GmbH & Co. KG Phone: +49 2351 9587-0
 EMEA Region & India E-mail: info.de@temposonics.com

ITALY Phone: +39 030 988 3819
 Branch Office E-mail: info.it@temposonics.com

FRANCE Phone: +33 6 14 060 728
 Branch Office E-mail: info.fr@temposonics.com

UK Phone: +44 79 44 15 03 00
 Branch Office E-mail: info.uk@temposonics.com

SCANDINAVIA Phone: +46 70 29 91 281
 Branch Office E-mail: info.sca@temposonics.com

CHINA Phone: +86 21 2415 1000 / 2415 1001
 Branch Office E-mail: info.cn@temposonics.com

JAPAN Phone: +81 3 6416 1063
 Branch Office E-mail: info.jp@temposonics.com

Document Part Number:
 551263 Revision H (EN) 09/2021



temposonics.com

© 2021 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at www.temposonics.com/trademarkownership.

SENSOR SELECTOR GUIDE

Magnetostrictive Liquid Level Transmitters

Level Plus®



MEASURING TECHNOLOGY

The liquid level transmitters provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness.

Each Level Plus® liquid level transmitter consists of a ferromagnetic waveguide, a float, a strain pulse converter and supporting electronics. The float, containing a permanent magnet and sitting on the liquid, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a liquid level measurement with both high accuracy and repeatability.


The technology, based on magnetostriction and is not exposed to mechanical stress. Therefore, the sensors exhibit considerably longer lifespans and much higher reliability when compared to other technologies, even in harsh working conditions. Furthermore, since the output from sensors corresponds to an absolute position, rather than a relative value, it is not required to recalibrate sensors.

COMPANY

Temposonics is recognized as an industry leader in sensing technologies and solutions. These sensors and transmitters permit high-precision and dynamic position and/or speed measurement in state-of-the-art automation and safety-relevant systems. With a versatile and ever-increasing product portfolio and a focus on superior regional support, Temposonics cooperates closely with customers, to optimize performance and reduce downtimes.

Outstanding quality associated with practical know-how ensures that customers achieve utmost productivity and success. Continuous research, development and production of sensor systems constantly enable new solutions for measuring tasks in the industrial, mobile hydraulics as well as process technology fields to be created.

Since April 2021, the company Temposonics is part of Amphenol Corporation (NYSE: APH). Amphenol is one of the largest manufacturers of interconnect products in the world. The company designs, manufactures and markets electrical, electronic and fiber optic connectors, coaxial and flat-ribbon cable, and interconnect systems. As sensor solutions manufacturer, Temposonics matches the portfolio of the group of companies that are all part of Amphenol, enabling customers to benefit from an extended, complementary product selection.

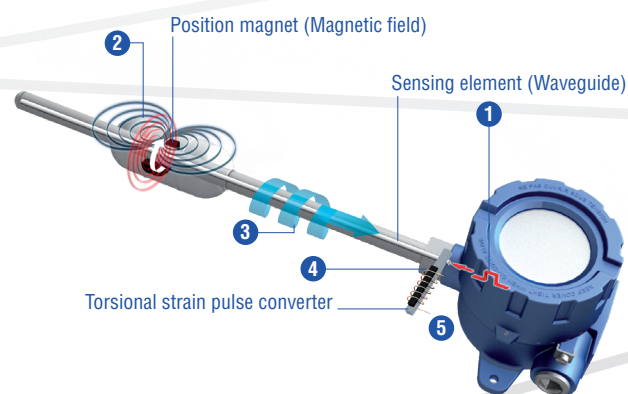

Measurement cycle

- 1 Current pulse generates magnetic field
- 2 Interaction with position magnet field generates torsional strain pulse
- 3 Torsional strain pulse propagates
- 4 Strain pulse detected by converter
- 5 Time-of-flight converted into distance

LP-Series					
	Tank SLAYER®	RefineME®	SoClean®	CHAMBERED	LevelLimit
FEATURES					
Product level	•	•	•	•	•
Interface level	•	•	•	•	•
Temperature	•	•	•	•	•
Rigid pipe		•		•	•
Flexible hose	•				•
Sanitary pipe			•		
Stainless Steel	•	•	•	•	•
Nickel Alloy C-276		•	•		
FEP		•			
HART®	•	•	•	•	•
Modbus / DDA	•	•	•	•	•
Current output	•	•	•	•	•
Integral HI Level Switch					•
Resolution	±1 mm (0.039 in.)	±1 mm (0.039 in.)	±1 mm (0.039 in.)	±1 mm (0.039 in.)	±1 mm (0.039 in.)
Maximum stroke length	22000 mm (866 in.)	7620 mm (300 in.)	7620 mm (300 in.)	6096 mm (358 in.)	22000 mm (866 in.)
CERTIFICATES					
ATEX	•	•	•	•	•
FM	•	•	•	•	•
CEC	•	•	•	•	•
IECEX	•	•	•	•	•
CCoE	•	•	•	•	•
NEPSI	•	•	•	•	•
KC	•	•	•	•	•
INMETRO	•	•	•	•	•
TIIS	•	•	•	•	•
SIL2	•	•	•	•	•

APPLICATIONS

- Tank SLAYER®
 - Bulk Storage Tanks
- LevelLimit
 - Oil Lease Tanks
- RefineME®
 - Reactors
 - Sump/Slop Tanks
 - Alkylation Tanks
 - SX Pools
- SoClean®
 - Bioreactors
 - CIP Tanks
- CHAMBERED
 - Magnetic Level Gauge

MARKETS

- Oil and Gas
- Chemical
- Specialty Chemical
- LPG
- Pharmaceutical
- Food and Beverage
- Mining
- Marine



FEATURES

- 5-IN-1 Measurement
 - Product Level
 - Interface Level
 - Multi-point Temperature
 - Volume
 - HI Level Switch
- No Scheduled Maintenance or Recalibration
- Intrinsically Safe
- Explosion Proof / Flameproof
- Inherent Accuracy ± 1 mm
- Integral Display with Through Glass Programming
- 200 point strapping table
- API Temperature Corrected Volume
- Field Repairable