



Stroke-Dependent Dead Zones (RF Model)  
 Stroke Length Dead Zones  
 254-9144 mm (10-360 in.) 94 mm (3.7 in.)

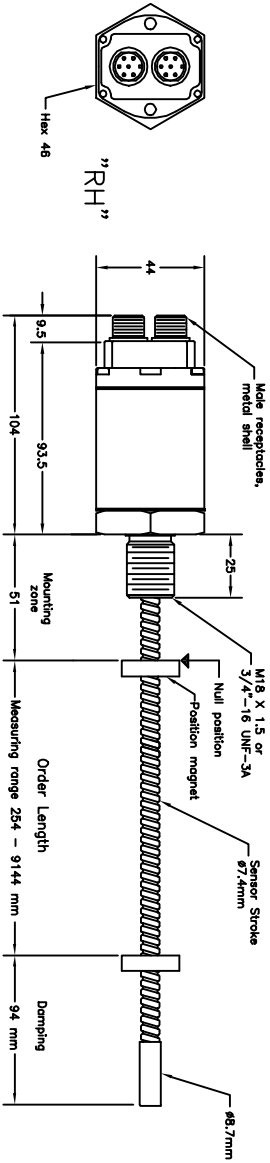

Mating connector

REV.	DATE	BY	ECO #	DESCRIPTION
C	2/2/01	KLP	4246	DELETED SECTION OF RIGID PIPE
B	1/13/00	LJH	3972	ADDED SECTION OF RIGID PIPE
A	11/7/98	KLP	3973	RELEASE TO PRODUCTION

UNLESS OTHERWISE SPECIFIED

2X ± 0.13

3X ± 0.25

4X ± 0.38

5X ± 0.51

REMOVE BORES AND SHARP EDGES AND HOLES AFTER PLATING OR CONVERSION COATING

DRILL, REPTING ARE TO 10° FULL TAPER

10° FULL TAPER

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

NO NET DRAWING

**MTS**  
**SYSTEMS CORPORATION**  
 SENSORS DIVISION  
 RESEARCH TRIANGLE PARK, NORTH CAROLINA 27709  
 TITLE: TEMPO 3 RF  
 FLEX SERIES  
 CANNBUS  
 DWG NO. 901031  
 REV C