


A Strong Partnership



MTS and leading manufacturers of hydraulic cylinders combine their strengths in the worldwide MTS *Integration PARTNER* Program. Manufacturers of mobile machines benefit from the long-term experience in sensor integration.

BENEFITS

- Intelligent cylinders with integrated Temposonics® sensors
- Cost optimized sensor installation
- Complete sensor-cylinder unit from one source
- High quality and reliability
- Service and application support

MTS Systems Corporation Sensors Division

3001 Sheldon Drive
Cary, North Carolina
27513, USA
Tel.: +1-800-633-7609
Fax: +1-919-677-2343
+1-800-498-4442

e-mail: sensorsinfo@mts.com
<http://www.mtssensors.com>

MTS Sensor Technologie GmbH & Co. KG

Auf dem Schüffel 9
D - 58513 Lüdenscheid,
Germany
Tel.: +49-2351-9587-0
Fax: +49-2351-56491

e-mail: info@mtssensor.de
<http://www.mtssensor.de>

Document Part Number: 551365, Revision A, 11/12

MTS and Temposonics are registered trademarks of MTS Systems Corporation.
All other trademarks are the property of their respective owners.
Printed in USA. Copyright © 2012 MTS Systems Corporation. All Rights Reserved in all media.

Temposonics® MH-Series

Model MH Agri

Position Sensor for Agricultural Machine

Requirements




NEW!

Optimized for Value and High Volume in
Agricultural Machine Applications

The Measurable Difference

**Intelligent Position Measurement for
Agricultural Machines**

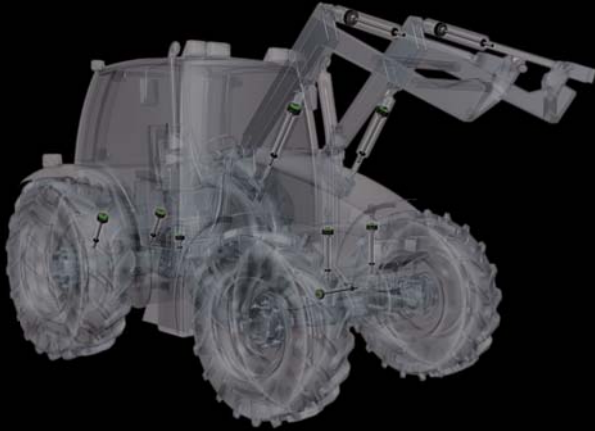

Temposonics®
MH-Series Model MH Agri
Position Sensor



NEW!

***Temposonics® MH Agri Position Sensors Provide
Versatile Sensing Solutions in Agricultural
Machines***

APPLICATIONS

- Autosteering in Tractors and Combines
- Cabin Suspension for Tractors and Harvesters
- Cut Height Control for Harvester Heads
- Cabin Height and Boom Control for Sprayers
- Many more Applications

***MTS Introduces Advancements in Agricultural
Machine Performance with NEW Innovative
Sensor Technology***

***Value Optimized for High Volume in
Agricultural Machine Applications***

FEATURES

- Electrical Stroke Length up to 1000 mm (40 in.)
- Stainless-Steel Housing
- Optional MTS Proprietary M12 Connector System (IP69k rated)
- Operating Voltage 12 Vdc
- Voltage Output